



COMMON MODE CHOKE

T18 type



Features/特徴

- Compact and low loss
小型で低損失を実現
- High noise suppression performance over a wide frequency range.
広い周波数領域でノイズ抑制効果を実現


Applications/用途

- For various switching power supply circuits
各種スイッチング電源回路用




Dimensions

T18V

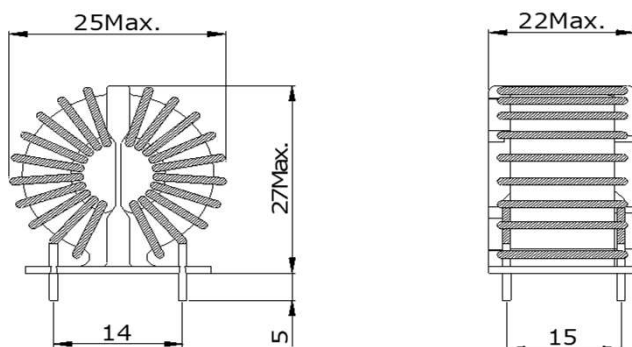

T18H

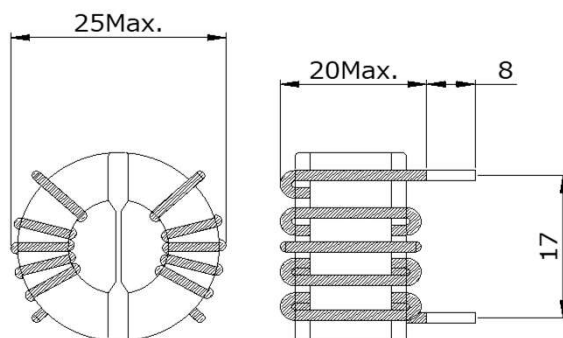

Electrical Characteristics

• T18V/H

Part Number	Inductance	DC Resistance	Rated current
	(mH) Min.	(mΩ) Max.	(A) Ta=85°C
T18V/H-1022R00	1.0	24	2.00
T18V/H-2022R00	2.0	31	2.00
T18V/H-3022R00	3.0	41	2.00
T18V/H-5022R00	5.0	49	2.00
T18V/H-1023R00	1.0	14	3.00
T18V/H-2023R00	2.0	20	3.00
T18V/H-3023R00	3.0	24	3.00
T18V/H-1025R00	1.0	10	5.00
Temperature limit /使用温度範囲		-30～120°C コイルの温度上昇を含む。	

Conditions/測定条件

(1) Measurement Frequency : 10kHz.

測定周波数：10kHz.

(2) Measurement Temperature : 23±2°C.

測定温度：23±2°C.

(3) This catalog contains the typical products only. As casutam specification are available.

We are ready to comply with your request.

本カタログには代表的な製品の仕様しか記載しておりません。当社製品のご使用を検討いただく際には、納入仕様書にて、詳細な仕様の確認をお願い致します。カスタム品も製造しておりますので、ご遠慮なく申しつけください。